


Multitemp MB700

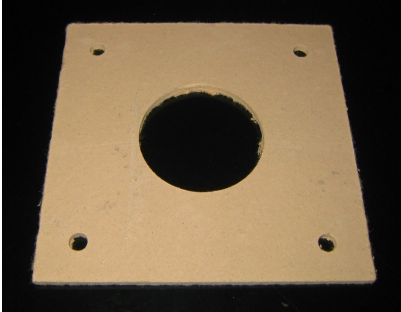

Properties	Units	Typical Value
Operating Temperature, Continuous	°C	1000
Operating Temperature, Max	°C	1000
Thermal Conductivity	W/mK	0.12
Electrical Conductivity	$\Omega \times 10^9 / \text{cm}^2$	7.9
Compressive strength	N/mm ²	5
Flexural strength 23 °C	N/mm ²	7

Product description:

Multitemp MB700 is a Millboard range made from several clay sorts and a temperature-resistant additives. Multitemp MB700 is an asbestos-free Millboard material.

The color = brown

Main applications:

Multitemp MB700 is asbestos-free and mainly used as a high-temperature insulation material in the glass-industry and gasket applications.

Availability:

Multitemp MB can be delivered as sheet cut-offs and finished parts.

- Max. sheet dimension 1000 x 1000 mm
- Thickness 1.5 – 12 mm